

## Declaration of performance No.:2/11/2014/CPR

1. Unique identification code of the product - type

DALMATYŃCZYK PLUS fasada EPS S EPS EN 13163 T(1)-L(2)-W(2)-Sb(5)-P(5)-BS75-DS(N)2-DS(70,-)2-TR80

2. Intended use/es

Thermal insulation for buildings.

3. Manufacturer

Termo Organika® Sp. z o.o.  
ul. B. Prusa 33, 30-117 Kraków, Poland

4. System/s of AVCP

System 3

5. Harmonised standard:

Harmonised standard: EN 13163:2012

Notified body/ies: ITB – Instytut Techniki Budowlanej (notified body No 1488)

6. Declared performances

Table 1

Essential characteristics	Performance	Declared level / Classe / Limit values/ /NPD <sup>1)</sup>	Harmonised technical specification
Reaction to fire	Reaction to fire	E	EN 13163:2012
Continuous Glowing combustion	Continuous Glowing combustion	NPD	
Water permeability	Water permeability	NPD	
Release of dangerous substances to the indoor environment	Release of dangerous substances <sup>2)</sup>	NPD	
Direct airborne sound insulation index	Dynamic stiffness	NPD	
Acoustic absorption index	-	NPD	
Impact noise transmission index (for floors)	Dynamic stiffness	NPD	
	Thickness, d <sub>L</sub>	NPD	
	Compressibility	NPD	
Thermal resistance	Thermal resistance R <sub>D</sub>	See Table 2	
	Declared thermal conductivity λ <sub>D</sub>	0,042 [W/mK]	
	Thickness, d <sub>N</sub>	T(1) (±1 mm)	
Water vapour permeability	Water vapour transmission	NPD	
Compressive strength	Compressive stress at 10 % deformation	NPD	

Termo Organika Sp. z o.o.  
ul. Bolesława Prusa 33, 30-117 Kraków

tel.: +48 12 427 07 40, fax: +48 12 427 27 21, www.termoorganika.pl, e-mail: styropian@termoorganika.pl



	Deformation under specified compressive load and temperature conditions	NPD	EN 13163 :2012
Tensile/Flexural strength	Bending strength	BS75 (≥ 75 kPa)	
	Tensile strength perpendicular to faces	TR80 (≥ 80 kPa)	
Durability of reaction to fire against heat, weathering, ageing/degradation	Durability characteristics <sup>3)</sup>	E	
Durability of thermal resistance against heat, weathering, ageing/degradation	Thermal resistance R <sub>D</sub> <sup>4)</sup>	See Table 2	
	Declared thermal conductivity λ <sub>D</sub> <sup>4)</sup>	0,042 [W/mK]	
	Durability characteristics	NPD	
Durability of compressive strength against ageing and degradation	Compressive creep	NPD	
	Freeze-thaw resistance	NPD	
	Long term thickness reduction	NPD	

<sup>1)</sup> No performance determined <sup>2)</sup> European test methods are under development <sup>3)</sup> The fire performance of EPS does not deteriorate with time <sup>4)</sup> Thermal conductivity and thermal resistance of EPS products do not change with time.

According to Article 6, paragraph 5 of the Regulation of the European Parliament and of the Council (UE) No 305/11 one informs that the information required by Regulation No 1907/2006 of The European Parliament and of The Council of 18 December 2006 concerning registration, evaluation, authorisation and applied restriction of chemicals (REACH) are given in " the Product information" which is on the manufacturer's website [www.termoorganika.pl](http://www.termoorganika.pl)

Additional information in form of instructions and technical data sheets are available on the manufacturer's website [www.termoorganika.pl](http://www.termoorganika.pl)

Table 2 Declared thermal resistance is dependent upon the thickness of a product.


Thickness $d_N$ , [mm]	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150
Thermal resistance $R_D$ , [m <sup>2</sup> K/W]	0,20	0,45	0,70	0,95	1,15	1,40	1,65	1,90	2,10	2,35	2,60	2,85	3,05	3,30	3,55
Thickness $d_N$ , [mm]	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300
Thermal resistance $R_D$ , [m <sup>2</sup> K/W]	3,80	4,05	4,25	4,50	4,75	5,00	5,20	5,45	5,70	5,95	6,15	6,40	6,65	6,90	7,10

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Jerzy Pasternak, Plenipotentiary of the Board for FPC

in Kraków, 06.11.2014

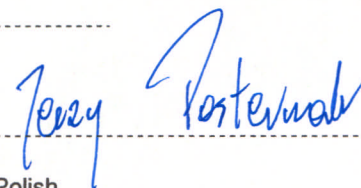

Note: This is the translation of the Declaration of Performance issued originally in Polish